


RTDs and Thermistors

Style RT with Thermowell

Straight Well

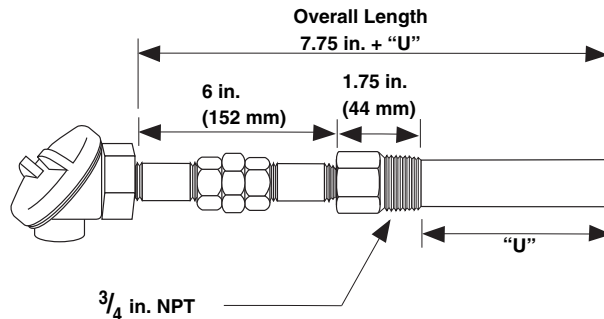


Rapid Ship Sensors

Rapid Ship sensors come with 316 SS straight well, nipple-union-nipple, 0.250 inch diameter spring loaded element, 100Ω DIN 0.00385 curve, Class A and three-wire RTD. Temperature rating -50 to 260°C (-58 to 500°F).

Calibration	"U"		Overall Length		Part Number
	in.	(mm)	in.	(mm)	
A	2.5	(64)	10.25	261	RTJE1SF024BA0Y0
	4.5	(114)	12.25	312	RTJE1SF044BA0Y0
	7.5	(191)	15.25	388	RTJE1SF074BA0Y0
	10.5	(267)	18.25	465	RTJE1SF104BA0Y0

Tapered Well

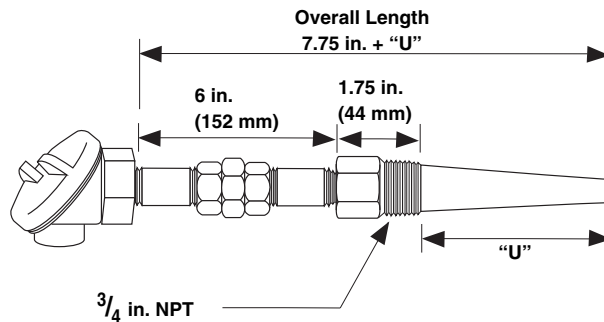

Rapid Ship Sensors

Rapid Ship sensors come with 316 SS tapered well, nipple-union-nipple, 0.250 inch diameter spring loaded element, 100Ω DIN 0.00385 curve, Class A and three-wire RTD. Temperature rating -50 to 260°C (-58 to 500°F).

Calibration	"U"		Overall Length		Part Number
	in.	(mm)	in.	(mm)	
A	2.5	(64)	10.25	261	RTJE1TF024BA0Y0
	4.5	(114)	12.25	312	RTJE1TF044BA0Y0
	7.5	(191)	15.25	388	RTJE1TF074BA0Y0
	10.5	(267)	18.25	465	RTJE1TF104BA0Y0